




SnapBrite S295-10W-12E

AC LED MODULE

10 Watt 660lm 12V AC

LOW VOLTAGE MULTI-LED DIMMABLE LINEAR MODULE

Technical Data Sheet





Direct Connect AC LED lighting technology

SnapBrite™ S295-10W-12E

Description

SnapBrite low voltage AC LED modules are fast, easy and reliable LED light sources for lighting OEMs in need of LED solutions that offer direct low voltage connectivity with a 12V AC electronic transformer.

Lynk’s patented AC LED technology eliminates the requirement for an expensive, bulky and failure prone AC – DC power supply or driver. Delivering efficiency, reliability and a high power factor, SnapBrite modules can be used by lighting manufacturers in many types of fixture as an effective replacement for energy hungry incandescent, Xenon or Halogen lamps. Additionally, the modules will dim with many popular leading and trailing edge phase cut dimmers designed for use with electronic transformers.

Look for the Lynk Labs name or this private label mark to ensure you are always backed by Lynk Labs high quality AC LED technology, IP, and reliability. Lynk Labs - Your AC LED Experts!



Features

- Direct 12V AC connection
- Compatible with existing 12V Electronic AC Power Supplies
- Reliable, Fast & Easy - Plug & Play
- Works with most existing AC Dimmers
- High Power Efficiency
- High Power Factor
- Significant Energy Savings
- Durable Light Source
- Long Operating Life –

Applications

- Linear Lighting
- Cove Lighting
- Under Cabinet Lights
- Step Lights
- Accent Lights
- Garden Lights
- Display Lights






Contents:

1. Description, Features and Applications	2
2. Contents	3
3. Mechanical Dimensions	4
4. Electrical & Optical Characteristics	5
5. Absolute Maximum Ratings	5
6. C.I.E. Chromaticity Coordinates	6
7. Typical Electrical & Optical Characteristic Curves	9
8. Part Number Identification.....	12
9. Packaging	13
10. Reliability and Average Lumen Maintenance	13
11. Design Considerations/Specifications.....	13



3. Mechanical Dimensions Single LED Assembly

S295EP2HH10WXXKX-12E	Length	Width	Height
Size in Millimeters	295 mm	10 mm	2 mm
Tolerance	+/- 0.254mm	+/- 0.254mm	+/- 10%

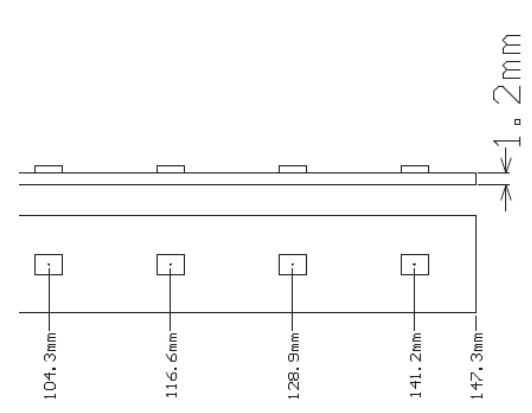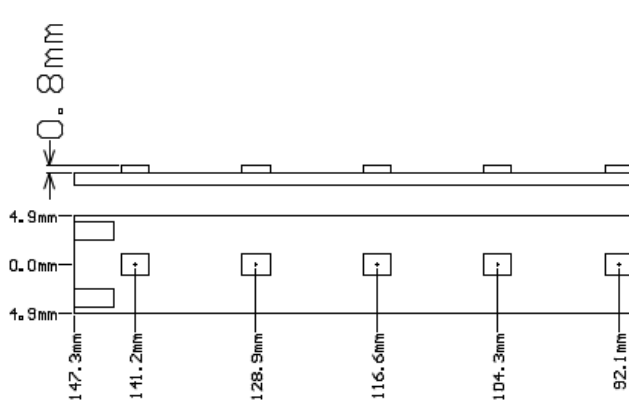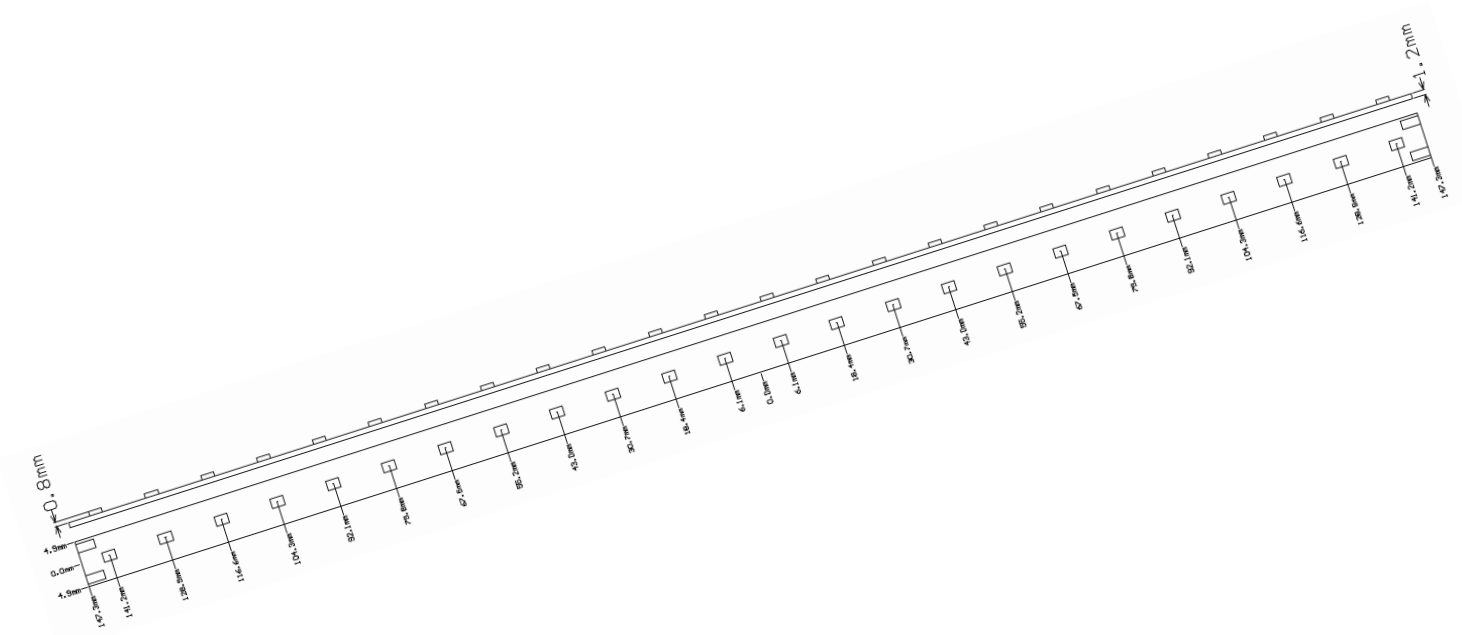

Notes :

1. All dimensions are in millimeters.
2. Tolerance is $\pm 0.05\text{mm}$ unless otherwise noted.



4. Electrical & Optical Characteristics

ITEM	SYMBOL	CONDITION	UNIT	MIN.	TYP.	MAX.
Drive Voltage	V _f	12V AC	V _{rms}	7	12	13
Viewing Angle	2θ _½		deg		120	
Thermal Resistance	R _{θj-c}	I _f =840 mA _{rms}	°C/W		tba	
Typical Operating Power	W _T	I _f =840 mA _{rms}	W		10	
Luminous Flux (3000K)	Φ	V _f =12 V _{rms}	lm		660	
Luminous Efficacy (3000K)	η _v	V _f =12 V _{rms}	lm/w		66	

*Measurement Uncertainty of the Luminous Flux: ± 10%

*Values given are for specified drive current/voltage at 25°C ambient temperature and 25°C case temperature

MODEL NUMBER	CCT	CRI	VAC	POWER	LUMEN	lm/W
S295EP2HH10W27KXS-12E	2700K	80	12	10	653	65
S295EP2HH10W30KXS-12E	3000K	80	12	10	660	66
S295EP2HH10W40KXS-12E	4000K	80	12	10	680	68

Other CCTs & 90 CRI Option may be Available to Special Order


5. Absolute Maximum Ratings (@ Ta=25°C)

ITEM	SYMBOL	ABSOLUTE MAXIMUM RATING	UNIT
Power Dissipation	P _d	14	W
A.C. Current	I _f	1167	mA _{rms}
AC Voltage	V _f	13	V
Operating Temperature	T _o	-25 ~ +100	°C
Storage Temperature	T _s	-40 ~ +100	°C
Soldering Temperature(Hand)	T _{sld}	370	°C



6. CIE Chromaticity Coordinates

White Binning Structure Graphical Representation

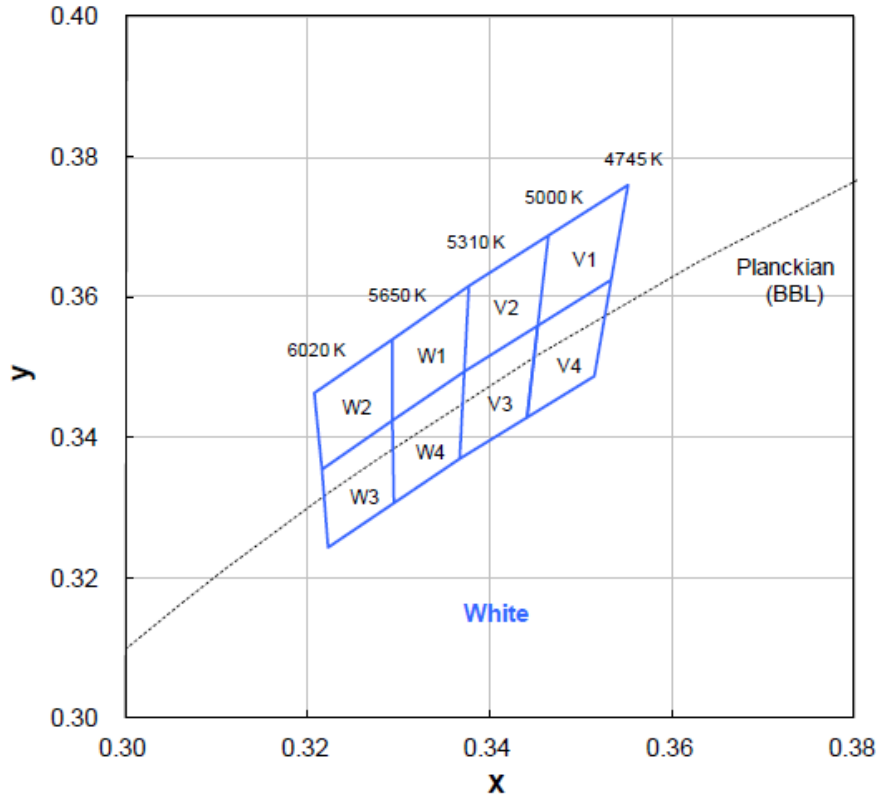


White Bin Structure

Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
V1	0.346	0.369	4870	W1	0.329	0.354	5475
	0.355	0.376			0.338	0.362	
	0.353	0.362			0.337	0.349	
	0.345	0.356			0.329	0.342	
V4	0.345	0.356	4870	W4	0.329	0.342	5475
	0.353	0.362			0.337	0.349	
	0.352	0.349			0.337	0.337	
	0.344	0.343			0.329	0.331	
V2	0.338	0.362	5155	W2	0.321	0.346	5830
	0.346	0.369			0.329	0.354	
	0.345	0.356			0.329	0.342	
	0.337	0.349			0.322	0.335	
V3	0.337	0.349	5155	W3	0.322	0.335	5830
	0.345	0.356			0.329	0.342	
	0.344	0.343			0.329	0.331	
	0.337	0.337			0.322	0.324	

- Tolerance on each color bin (x , y) is ± 0.01



Neutral White Binning Structure Graphical Representation

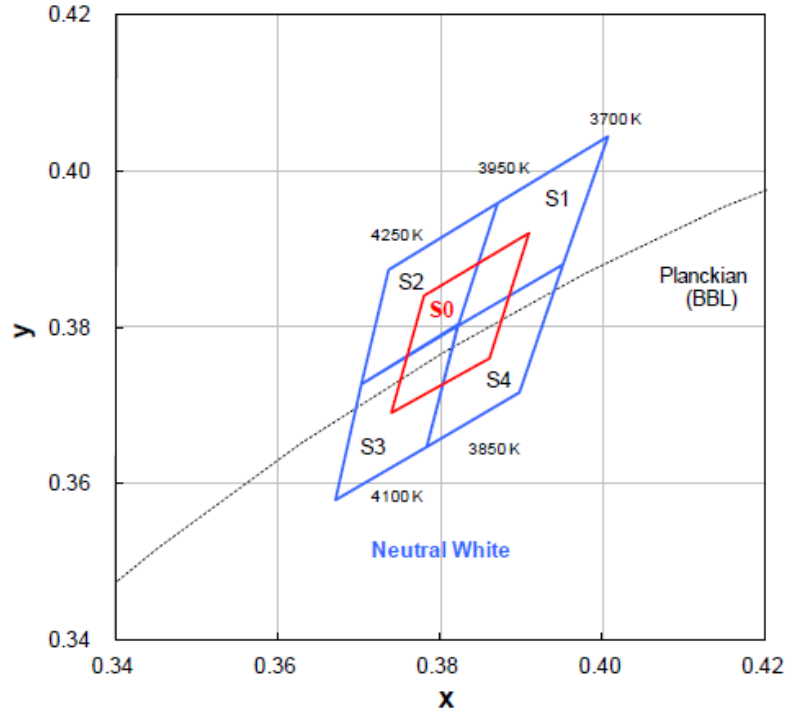


Neutral White Bin Structure

Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
S1	0.387	0.396	3825	S2	0.374	0.387	4100
	0.401	0.404			0.387	0.396	
	0.395	0.388			0.382	0.380	
	0.382	0.380			0.370	0.373	
S4	0.382	0.380	3825	S3	0.370	0.373	4100
	0.395	0.388			0.370	0.373	
	0.390	0.372			0.382	0.380	
	0.378	0.365			0.378	0.365	
S0	0.374	0.369	3975		0.367	0.358	
	0.378	0.384			0.374	0.369	
	0.391	0.392			0.378	0.384	
	0.386	0.376			0.391	0.392	

- Tolerance on each color bin (x , y) is ± 0.01



Warm White Binning Structure Graphical Representation

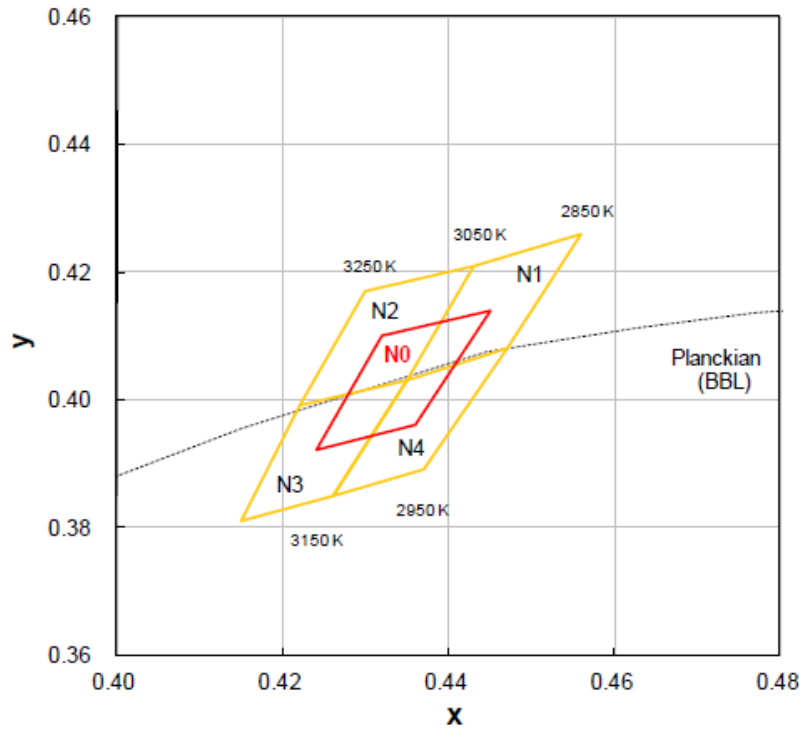

Warm White Bin Structure


Bin Code	x	y	Typ. CCT (K)	Bin Code	x	y	Typ. CCT (K)
N1	0.443	0.421	2950	N2	0.430	0.417	3150
	0.456	0.426			0.443	0.421	
	0.447	0.408			0.435	0.403	
	0.435	0.403			0.422	0.399	
N4	0.435	0.403	2950	N3	0.422	0.399	3150
	0.447	0.408			0.435	0.403	
	0.437	0.389			0.426	0.385	
	0.426	0.385			0.415	0.381	
N0	0.424	0.392	3050				
	0.432	0.410					
	0.445	0.414					
	0.436	0.396					

- Tolerance on each color bin (x , y) is ± 0.01




7. Typical Electrical & Optical Characteristic Curves With ballast Resistor


Relative Power vs Voltage

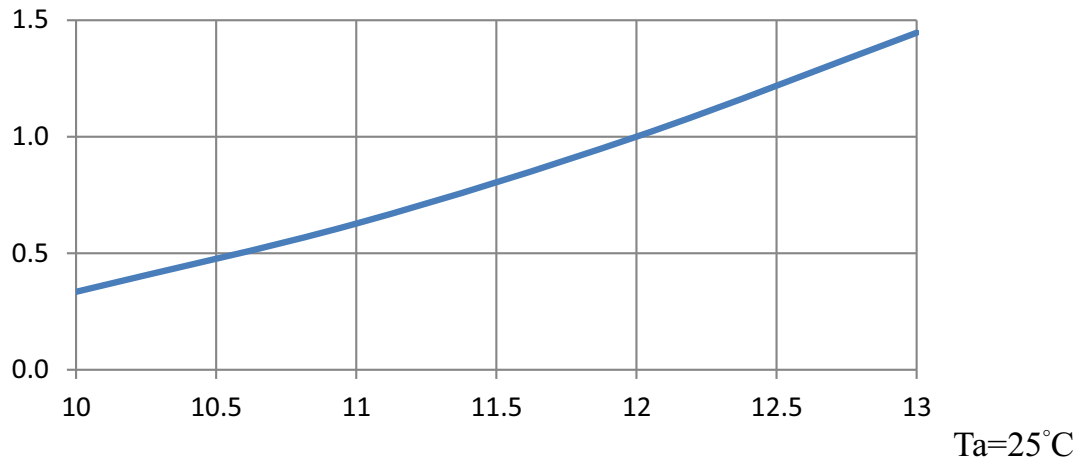

Relative Luminous Flux vs. Voltage

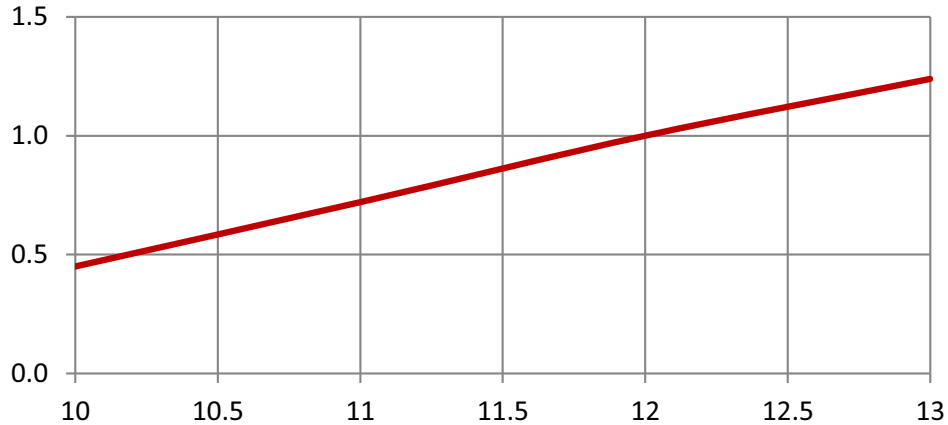


Lumen Thermal de-rating curve

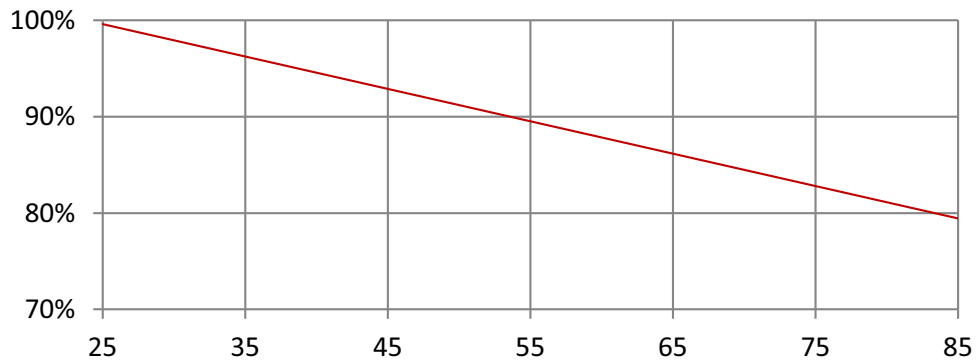





1. White

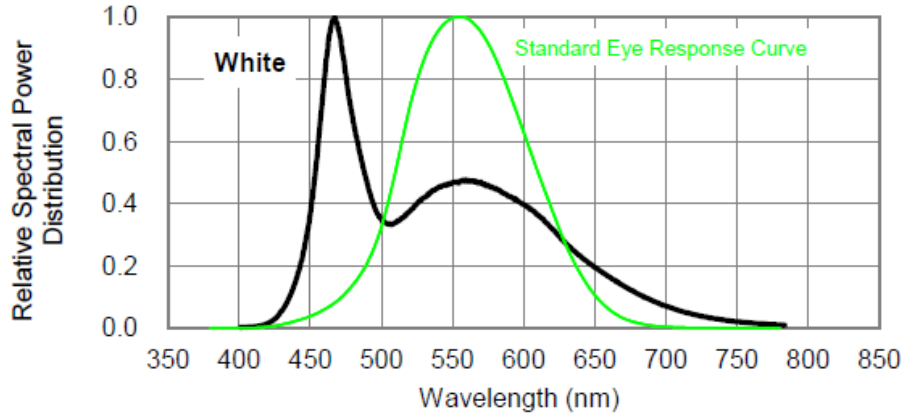


2. Neutral White

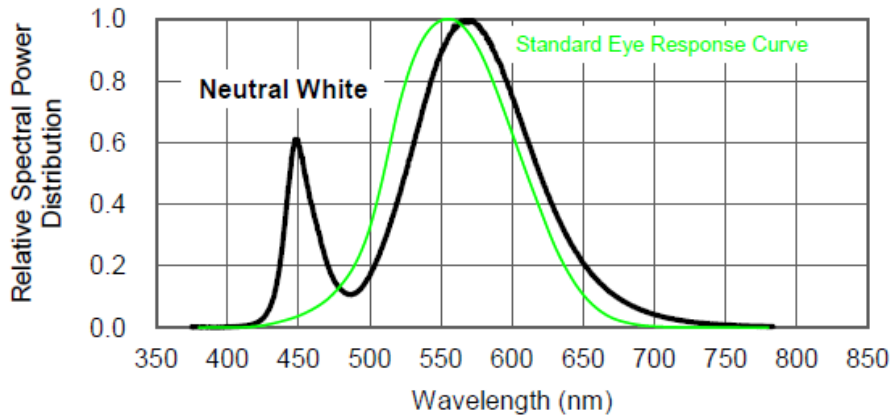



3. Warm White

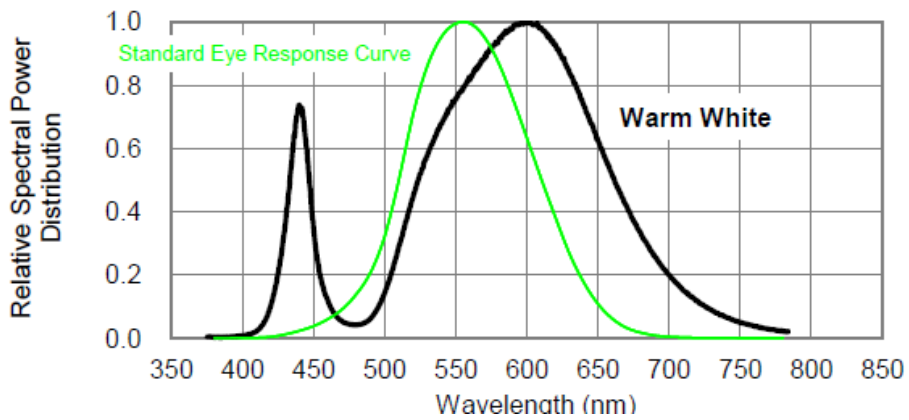

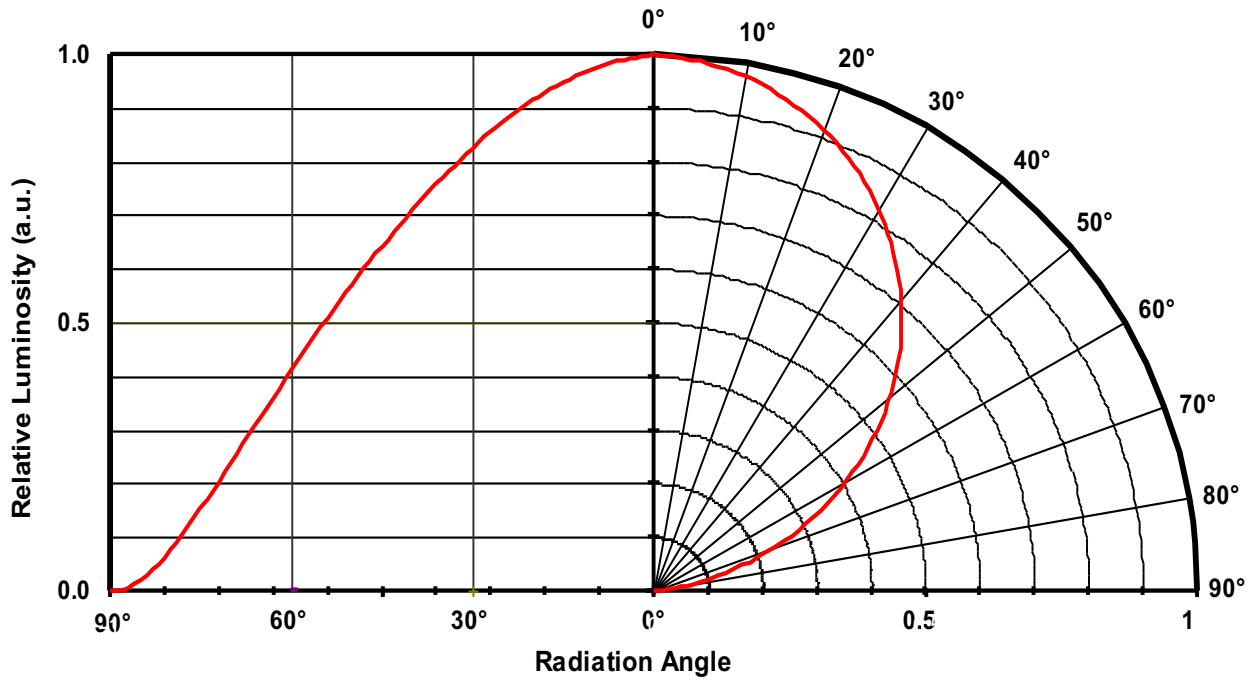



8.Part Number Identification

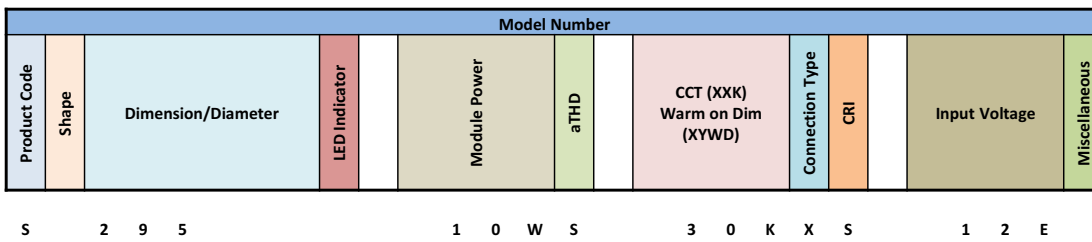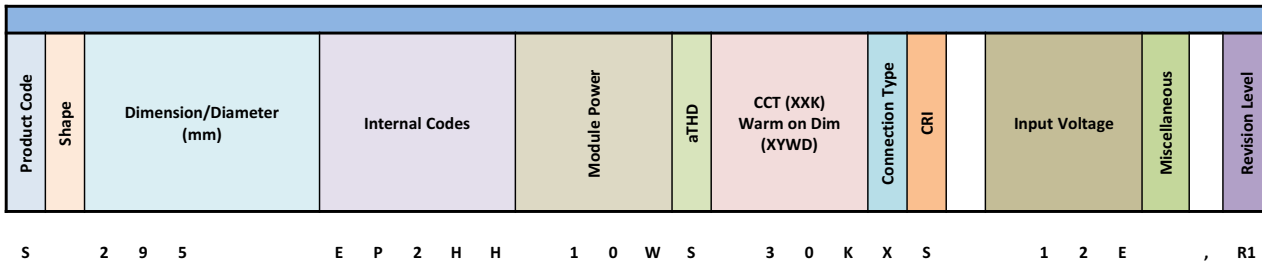

Product Code	
S	= SnapBrite™
T	= Tesla™
G	= GeoLite™
B	= BriteDriver®

Shape	
R	= Round
S	= Square
T	= Star
L	= Linear

Dimension/Diameter		
L	=	X X X
W	=	Y Y Y
D	=	Z Z Z

Module Power	
Q	= 0.25W
H	= 0.5W
T	= 0.75W
R	= Decimal Point

aTHD	
L	= < 20%
S	= ≥ 20%

Miscellaneous	
	Customer Code
	Special Design
	Special Silk Scn
	TBA

CCT/WOD				
2	2	K		= 2200K
2	7	K		= 2700K
3	0	K		= 3000K
3	5	K		= 3500K
4	0	K		= 4000K
5	0	K		= 5000K
5	7	K		= 5700K
3	2	W	D	= ~ 2700K To 2200K Warm on Dim
4	2	W	D	= ~ 3000K To 2200K Warm on Dim
5	2	W	D	= ~ 3500K To 2200K Warm on Dim

Connection Type	
C	= Poke-in Connector
I	= Insulation Displacement Connector
O	= Connector + Solder Pads
W	= Wire "Pigtail"
X	= Solder Pads

CRI	
L	= < 80 CRI
S	= ≥ 80 CRI
H	= ≥ 90 CRI

Revision Level	
	P1 to 9, Prelim
	R1 to ∞, RIs
	TBA

LED Indicator	
P	Prolite
E	EverLite
D	Interlight
C	Citizen
S	SemiLeds
N	Nichia
...	TBA

Input Voltage	
12V	= 12 VAC, Magnetic or Electronic Transformer Source
12E	= 12 VAC, Electronic Transformer Source Only
120V	= 120 VAC
120R	= Rectified 120 VAC
230V	= 230 VAC



9. Packaging

LED Modules will be packaged in trays for primary protection.

According to the total delivery amount, cardboard boxes will be used to protect the Trays of LED Modules from mechanical shocks during transportation.

The boxes are not water resistant and therefore must be kept away from water and moisture.

10. Reliability and Average Lumen Maintenance

Before releasing new products the manufacturer puts a representative product sample set through an entire suite of qualification tests, including the most stressful test for high power LEDs, the Wet High-Temperature Operating Life (WHTOL) test at 85°C/85%RH for 1000 hours at the specified operating current.

LED lifetime has been extrapolated based on the accumulated operating and accelerated aging data. Based on this data, the manufacturer projects that the LED products will deliver, on average, 70% lumen maintenance at 50,000 hours of operation at the specified operating current, provided that the case temperature is maintained at or below 80°C.

11. Design Considerations/Specifications

11.1 Thermal Management Requirements

- a. Heat Sink Required (22 square cm/watt surface area)
- b. Thermal epoxy – No mechanical mounting required
- c. Thermal tape – No mechanical mounting required
- d. Thermal grease – Mechanical mounting required

11.2. Mechanical Mounting

- a. Use nylon washers for all mounting holes when using screws.
- b. Do not put force on LEDs.
- c. Do not bend PCB.

11.3. Electrical Interface

- a. Solder Pads